



NW110-2: 8 Port 10/100Mbps PoE + 1 Port 10/100 Uplink

The **NW110-2** is an 8 port 10/100Mbps PoE Ethernet Switch with 1 port 10/100Mbps uplink designed for IP surveillance equipment.


Model:

- **NW110-2** (8 Port 10/100Mbps PoE switch + 1 Port 10/100Mbps uplink)




Product Layout:


Front board

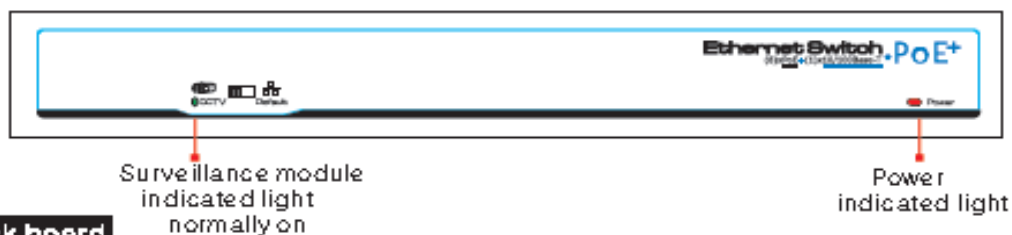


Back board

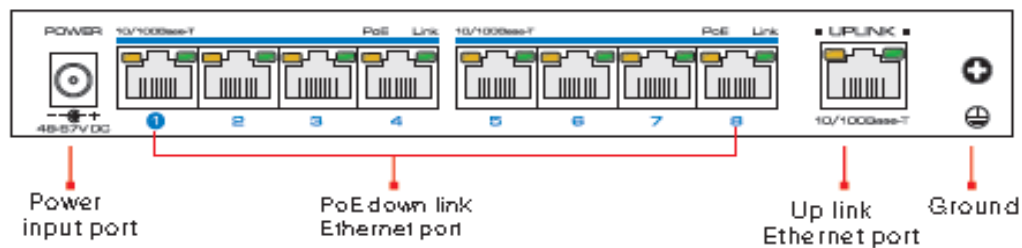

Side board

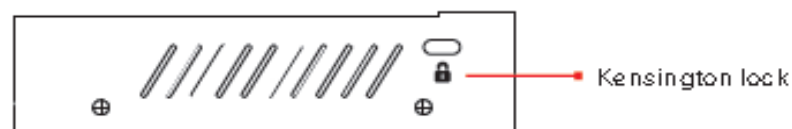

Product Application:

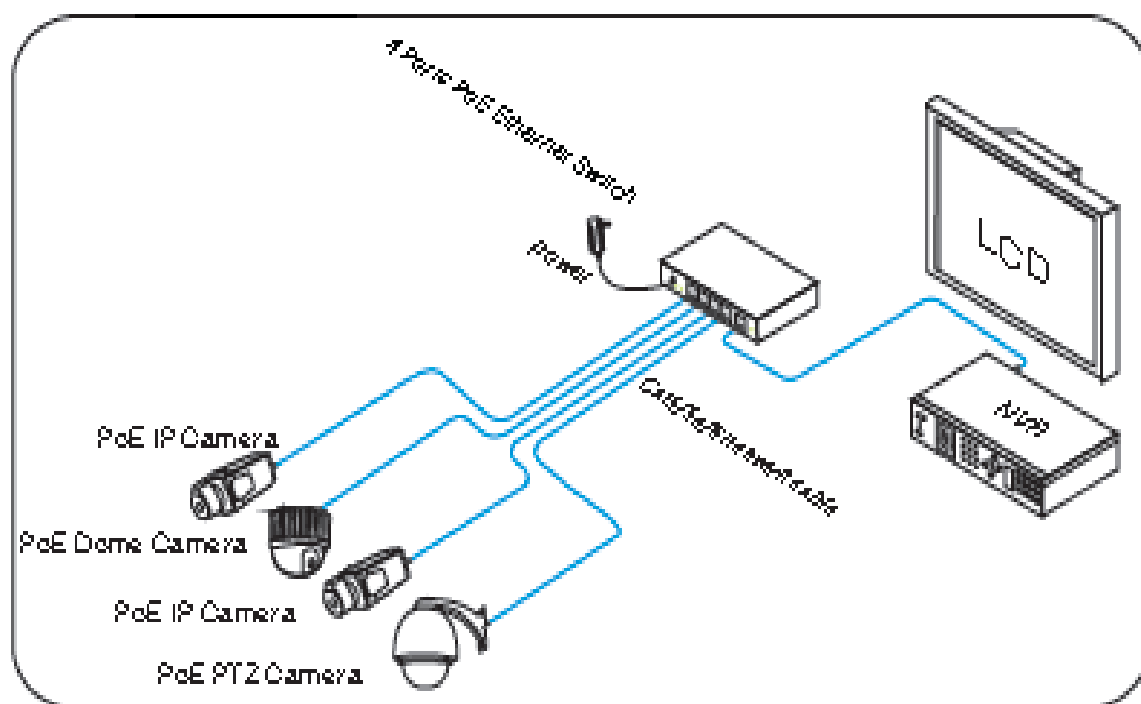

Technical Specifications:

Item		Description
Model		8 Ports PoE Ethernet Switch
Power	Power Supply	Power Adaptor Input
	Voltage Range	DC48V-57V
	Consumption	The Equipment<5W,PoE output<120W
Ethernet	Ethernet Port	1-8 Ethernet Port: 10/100Mbps Uplink Port: 10/100Mbps
	Transmission Distance	Down Link Port:0-100m Uplink Port:0-100m
Network Switch	Ethernet Standard	Support IEEE802.3/802.3u/802.3x/802.1p/802.1q/IEEE802.3af/at
	Backplane Bandwidth	1.8G
	Packet Forwarding Rate	1,34Mbps
	Packet Buffer	768k
	MAC	2k
Status Indicator	Power Light	1 pc(red)
	Ethernet Port Light	RJ45port 2 pcs yellow Indicates PoE, green Indicates Act
	Surveillance Module Light	1 pc(green)
Protection Level	Pluse Group	Level 2 Standard: IEC61000-4-4
	ESD	1a Contact Discharge Level 2 1b Air Discharge Level 2 Standard : IEC61000-4-2
	Surge Protection	Level 2 Standard : IEC61000-4-5
Working Environment	Operating Temperature	-10°C ~ 55°C
	Storage Temperature	-40°C ~ 75°C
	Humidity(Non-condensing)	0 ~ 95%
	Dimension(L*W*H) Include Port	200mm*105mm*27mm
Mechanical	Case	Galvanized Sheet
	Colour	Black
	Weight	500g